


## ON-METAL HIGH TEMPERATURE HARDY\_HT2626

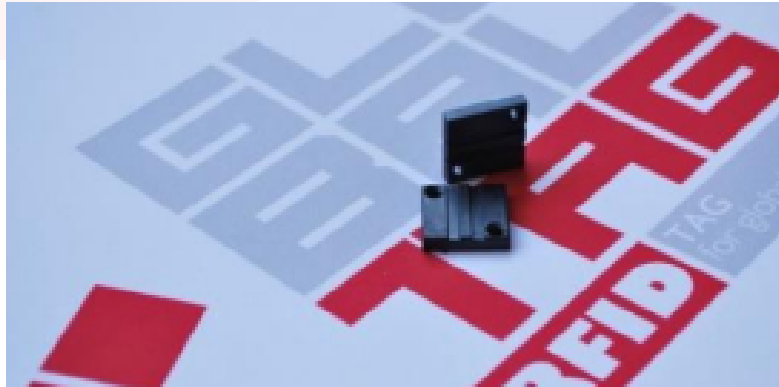

Global Tag **ON-METAL HARDY\_HT2626** is an on-metal UHF tag for high temperature environment with good performance. It is the best solution if you need to integrate transponder into a metal objects in industrial environment, where the requirement is to withstand high temperature (up to 230°C). It has two holes for a fixing way.

### **MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS:**

**Dimensions:** 26x26mm (1,02x1,02inch) / thickness: 5mm (0,20inch)

**Mounting System:** Adhesive (3M); screws (4mm holes).

**Weight:** 6,6gr.

**Material:** PCB Material

**Color:** Generally black color – Available optionally any other colors

**Class Protection:** IP67 (Totally protected against ingress of solid / Protected against short periods of immersion in water.)

**Storage Temperature:** -20°C to + 150°C (30min up to 230°C)

**Operating Temperature:** -30°C to + 100°C

**Weather Ability:** Very Good, including UV resistance and sea water

**Delivery format:** Individual

**Expected lifetime:** Years in normal operating conditions

**Chemical resistance:**

No physical or performance changes in (tested up to, more hours can be):

- 200 hours Motor oil immersion
- 200 hours Salt water (salinity 10%) exposure
- 200 hours H2SO4 Sulfuric acid (10% pH 2) exposure
- 24 hours NaOH Caustic Soda (10%, PH 13) exposure

- 24 hours HCl Muriatic Acid (10%) exposure
- 24 hours Na<sub>2</sub>CO<sub>3</sub> Soda Solvay
- 24 hours NH<sub>3</sub> Ammoniac (5% to 25%)

Values in the table are the best recommendations; resistance against environmental conditions depends on the combinations of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. We are available for other information.

### **INSTALLATION MODE:**

**With 3M Adhesive model:** when mounting the tag with adhesive background, clean and dry the surface to get the maximum bond strength. Through the 2 holes (4mm)

### **CUSTOMIZATION OPTIONS:**

**Laser engraving:** serial progressive number from database, randomize number from database text and Barcode or QRCode. Other customizations on request.

**Pre-Encoding:** Customer specific encoding of EPC or User Memory (also from Database). Locking permanently or with password. Insert into Database TID code.

### **ORDER INFORMATION:**

**Standard product is made with Alien Higgs3 chip**

**PRODUCT CODE:** GT-HRDY\_HT2626-AH3

For printing options or for produce transponder with different color or with other type of customization... contact us for more information:

**Global Tag Srl** – Via Zanardelli 13/A, 25062 Concesio (BS) - Italy

**P** +39 030 2005259

**S** global-tag

**W** www.global-tag.com

**M** sales@global-tag.com