


ONE-TIME-USE CABLE TIE

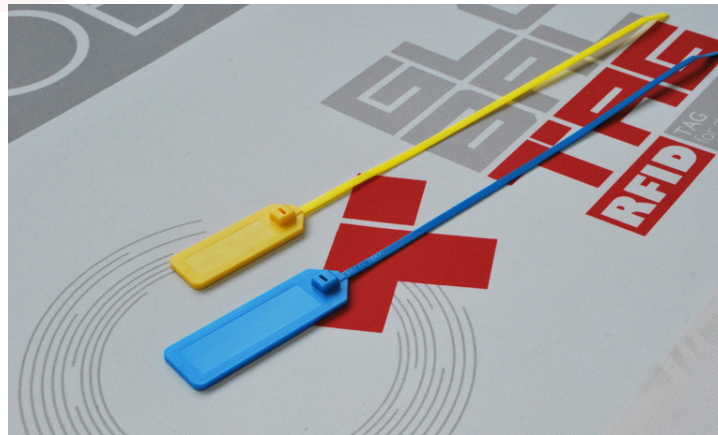

Global Tag **One-time-use Cable Tie** is the disposable RFID Tag with cable tie form. It is available in HF 13.56Mhz, both ISO 14443 (NFC) and ISO 15693, and in UHF 860-960Mhz. Different customizations are available such as logo printing, serial number laser engraving, EPC and user memory encoding.

MAIN FEATURES:

Dimensions:

- **LF, HF/NFC or UHF Version:** 340x28mm (including 285mm tail length) / thickness 4mm
- **UHF only Version:** 375x28mm (including 285mm tail length) / thickness 4mm

Color: Different colors

Storage Temperature: -30°C to + 100°C

Operating Temperature: -25°C to + 85°C

IC Chip:

- **LF:** TK4100, EM4200, T5577
- **HF/NFC:** Mifare Ultralight, NXP Mifare Classic 1K, N-Tag213, N-Tag216, I-Code SLIX, others on request
- **UHF:** Alien Higgs3, Alien Higgs9, NXP U-Code8, NXP U-Code9, Monza R6, others on request

Product Code: GT-CBLY-XX (xx defines the IC chip type)