


SEAL TAG WITH ANTI-TAMPER FUNCTION

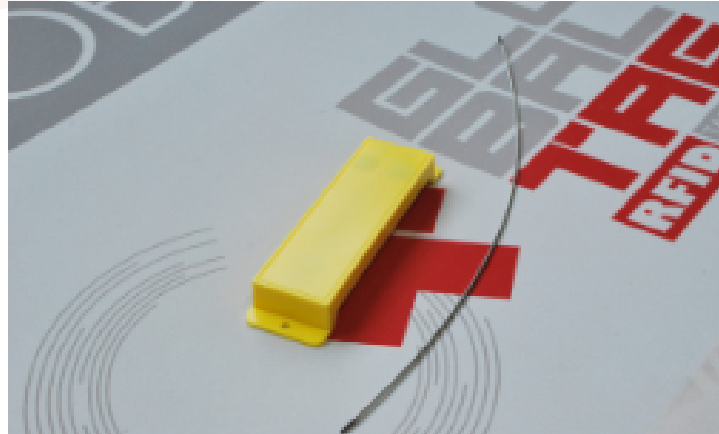

Global Tag **TAMPER EVIDENT UHF SEAL TAG** has been developed for indoor and outdoor applications where the main need is to strongly seal an object, thanks to the steel tail, and to know if the tagged goods have been tampered.

Indeed, EPC status change indicates if the tag has been tampered or not.

It is widely used for the security management of objects such as containers, luggage, transition boxes, etc.

MAIN FEATURES:

Dimensions: 130mm*37*16mm / tail length: 275mm

Mounting System: As cable tie

Weight: 40gr.

Material: High Quality ABS

Color: Different colors available

Class Protection: IP68 (Totally protected against ingress of solid / Protected against long period of immersion)

Storage Temperature: -35°C to +100°C

Operating Temperature: -25°C to +85°C

Weather Ability: Very Good, including UV resistance and sea water

Delivery format: Individual

Expected lifetime: Years in normal operating conditions

CHIP SPECIFICATION AVAILABLE:

	UHF 860-960MHz
Device type	Class 1 Gen 2
Air interface protocol	ISO18000-6C GEN2 V2
IC Type Available	CAB0/CAB1
Memory	TID/UID 112bit+ EPC/Block 196bit+ User File_0 with 512bit of data+ Reserve 112bit
Read Range	Up to 6meters

CUSTOMIZATION OPTIONS:

Printing laser engraving: Serial UID, serial progressive number from database, randomize number from database text and Barcode or QRCode. Other customizations on request.

Silk Printing : 4-colors printing logo

Pre-Encoding: Customer specific encoding of EPC or User Memory (also from Database). Locking permanently or with password. Insert into Database TID code.

INSTALLATION MODE:

Squeeze the wrapper around the object.

ORDER INFORMATION:

PRODUCT CODE: GT-SLTC_TE-CB

For more information:

Global Tag Srl – Via Zanardelli 13/A, 25062 Concesio (BS) - Italy

P +39 030 2005259

S global-tag

W www.global-tag.com

M sales@global-tag.com