


SEAL TAG HF

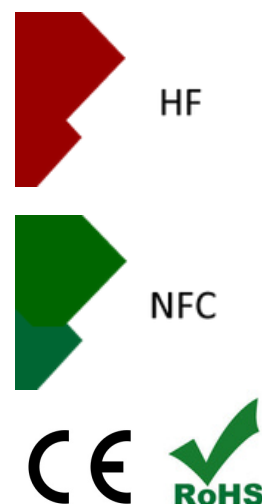

Global Tag **HF/NFC SEAL TAG** combines the security features of a conventional seal with RFID technology, providing a practical solution for the identification, tracking and protection of assets, products and equipment. Its design allows secure physical attachment while enabling contactless data reading through HF or NFC technology.

It is particularly suitable for applications such as resource management, electrical inspections, inventory control, distribution and rental services, as well as maintenance and repair activities where reliable identification and traceability are required.

Different customization options are available, including custom colors, memory encoding, serial number engraving and additional features on request, allowing HF/NFC SEAL TAG to be adapted to different operational and project requirements.

MAIN FEATURES:

Dimensions: 300x35x11mm (including tail length 280mm)

Mounting System: Wrapper mono-use system

Weight: 20,5gr.

Material: High Quality ABS + steel

Color: Generally white - customizable

Class Protection: IP67

Storage Temperature: -25°C to +85°C (for any other particular request contact us)

Operating Temperature: -20°C to +80°C

Weather Ability: Very Good, including UV resistance

Delivery format: individually

Expected lifetime: Years in normal operating conditions

CHIP SPECIFICATION AVAILABLE:

	HF 13,56MHz
Device type	N.D.
Air interface protocol	ISO14443 and ISO15693 and NFC
IC Type Available	I-Code SLIX, I-Code SLIS, Mifare Ultralight, Mifare Classic 1K, Mifare Classic 4K, Mifare Plus X 4K, Mifare Desfire 4K, STM LRI2k, Ntag203, other on-request
Size Inlay	It depends on IC chip chosen
Read Range	From 2 to 150cm (150cm can be in High Performance SLIX solution)

CUSTOMIZATION OPTIONS:

Printing laser engraving: Serial UID, serial progressive number from database, randomize number from database text and Barcode or QRCode. Other customizations on request.

Silk Printing : 4-colors printing logo

Pre-Encoding: Customer specific encoding of EPC or User Memory (also from Database). Locking permanently or with password. Insert into Database TID code.

INSTALLATION MODE:

Insert the wire into the dedicated hole and tighten it

APPLICATION NOTE:

Asset management: **SEAL TAG** can be used to track and manage corporate asset even when they are outdoors or in harsh conditions. Thanks to the long tail, it can be easily applied also on big objects without possibility to remove it.

Maintenance: **SEAL TAG** is a strong tag designed to improve maintenance services with easy installation on all surface.

Cables Tracking: **SEAL TAG**, with its cable-tie form, is a great solution for the tracking of hard cables.

ORDER INFORMATION:

PRODUCT CODE: GT-SLLY -XX (xx defined type of chip required)

For printing options or for produce transponder with different color or with other type of customization... contact us for more information:

Global Tag Srl – Via Zanardelli 13/A, 25062 Concesio (BS) - Italy

P +39 030 2005259

S global-tag

W www.global-tag.com

M sales@global-tag.com

DISCLAIMER:

The information in this document is subject to change without notice. Global Tag assumes no responsibility for any errors that may appear in this document. Application recommendations are guidelines only - actual results may vary and should be confirmed. This is a general-purpose product not designed or intended for any specific application. Global Tag Srl or its subsidiaries are not responsible for the performance or support of third party products and does not make any representations or warranties whatsoever regarding quality, reliability, functionality, or compatibility of these devices or products.

© Copyright 2025 - Global Tag Srl